



Wrangler® 1708/2008

Compact Automatic Scrubbers



Ergonomic design, simple operation and a compact body make the Wrangler 1708 and Wrangler 2008 the best values in small scrubbers.

- Designed for applications from 10,000 to 30,000 square feet, these Wranglers are perfectly sized for small office buildings, convenience stores, and nursing homes. They are also ideal for larger facilities with confined areas, such as grocery store checkout aisles, school cafeterias, commercial kitchens, and hospital rooms.
- Wrangler compacts feature an 8-gallon solution tank and an oversized 10-gallon recovery tank, which allows room for foam, helping protect the vacuum motor from moisture.
- The 32-inch straight squeegee features a breakaway assembly to prevent damage when it inadvertently catches on any fixed object. Reconnecting is as simple as hand tightening two control knobs.
- To simplify pad changing, a foot latch at the front of the machine allows the body to tilt up and back. This also provides easy access to the batteries and all internal components.
- Wrangler compacts are available with a 17-inch or 20-inch scrubbing path in either battery-powered (AB) or cord-electric (AE) models.
- The on-board charger, standard on all battery-powered Wrangler autoscrubbers, allows the batteries to be charged anywhere an electrical outlet is available.



NSS® Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA
www.nss.com

Battery-Powered Wrangler 1708/2008 AB Specifications

Brush/Pad -1708 AB -2008 AB	17 in. (43 cm) 20 in. (51 cm)	Tank Capacity -Solution -Recovery	8 gal. (30 l.) 10 gal. (38 l.)	Sound Level	66 dbA @ operator
Pad Drive Motor -Type -Speed	Permanent magnet, 24V. DC 0.75 HP 270 RPM	Squeegee	32-in. (81 cm) swing type with breakaway feature; picks up in forward and reverse	Dimensions Length Width -1708 -2008 Body Height Handle Height Weight -Machine • 1708 AB • 2008 AB -Shipping • 1708 AB • 2008 AB	44.5 in. (113 cm) 19 in. (48 cm) 21.5 in. (55 cm) 30.5 in. (77.5 cm) 40.5 in. (103 cm) 345 lbs. (156.5 kg) 347 lbs. (157.4 kg) 383 lbs. (173.9 kg) 387 lbs. (175.7 kg)
Vacuum Motor -Type -HP -CFM -Waterlift -Power	2-stage, bypass peripheral discharge 0.5 HP 65.1 49 in. (124 cm) Two 12V., 115 AH	Construction -Body -Wheels -Casters	Rotocast polyethylene tanks/body, hinged on steel frame Two 8-in. (20 cm) non-mark- ing wheels. Two front 3-in. (7.6 cm) ball- bearing swivel casters Ball type	Shipping Class	125
Batteries	2-12V., 115 AH	-Float		Warranty	3 year limited 10 year poly parts
Productivity — Figures taken from ISSA 447 Clean- ing Times.			Wrangler 1708 AB		Wrangler 2008 AB
	Per Hour Theoretical/Practical		12,739 / 5,917 sq. ft.		14,960 / 6,960 sq. ft.

Cord-Electric Wrangler 1708/2008 AE Specifications


Vacuum Motor -Type -Voltage -HP -CFM -Waterlift	2-stage, bypass peripheral discharge 115V., (240V. available) 1.25 HP 92 84 in. (213 cm)	-Power Pad Drive Motor -Type -Voltage -HP Pad Speed	75 ft. (22 cm) 14-3 cord Permanent magnet, 120V. (240V. available) .75 HP 250 RPM	Weight - Machine • 1708 AE • 2008 AE - Shipping • 1708 AE • 2008 AE	233 lbs. (105.7 kg) 235 lbs. (106.6 kg) 271 lbs. (123 kg) 275 lbs. (125 kg)
--	---	--	---	---	--

① 8-gallon solution tank and 10-gallon recovery tank for increased productivity.

② Two 8-in. rear wheels and swivel front casters make the Wrangler 1708/2008 AB extremely maneuverable.



A foot latch at the front of the machine provides access to make pad changes quick and easy.

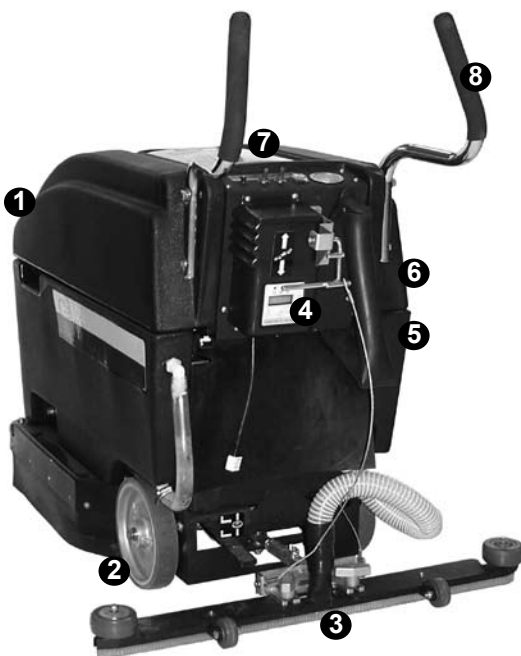

③ The oversized 32-in. squeegee picks up in forward and reverse, swinging wide on turns to recover all solution.

⑧ The ergonomic handles provide increased control while reducing operator fatigue.

⑦ Clear-view top port cover permits operator to easily monitor solution recovery.

⑥ Rotocast polyethylene body is dent-resistant and durable, and backed by a 10 year warranty.

⑤ Two 12V., 115 AH batteries power the vacuum and brush motors on the cordless models. The PROeye battery fluid indicator lets the operator easily monitor when a battery needs water.

④ The on-board battery charger allows recharging anywhere an electrical outlet is available.



NSS® Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958 USA
419/531-2121 or 800/677-1663
Fax 419/531-3761
www.nss.com
mailus@nss.com
Specifications and appearance
subject to change without notice.

DISTRIBUTED BY